




TEMPORARY HORIZONTAL ANCHORAGE LINE

TECHNICAL SHEET

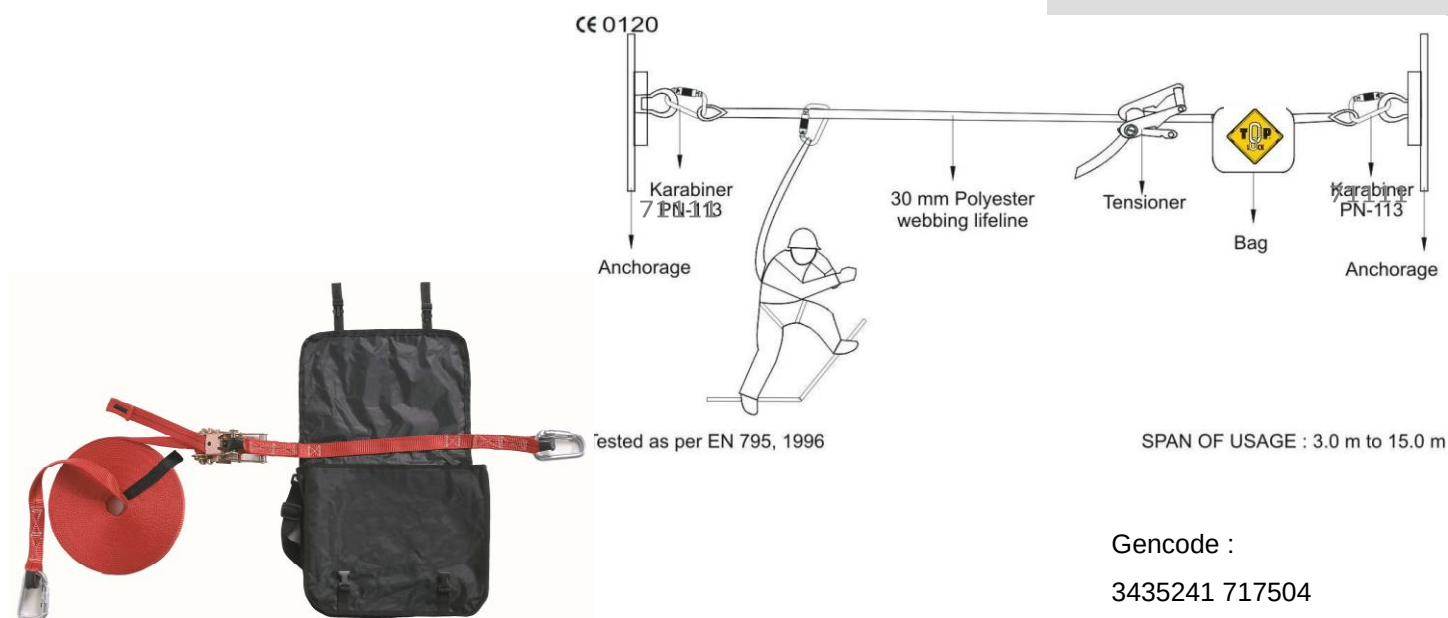

Gencode :
3435241 717504

GENERAL DESCRIPTION AND MATERIALS

- Red polyamide weaved lanyard
- Width : 30 mm
- Length : from 3.0m to 20.0m
- Static strength: > 11KN
- Equipped with ratchet tensioner
- Weight : 3450 g (+/-10%)
- Breaking strength minimum : 25KN

SPECIFIC ADVANTAGES

- 2 reinforced stitched loops
- Delivered with 2 connectors 71111

MAIN APPLICATION FIELDS

- Job in high places in combination with a fall arrestor system or a work positioning system.
- Can be used by 2 peoples at the same time
- To be used horizontally only
- Construction and civil engineering
- Dynamic strength: mass of 100Kg maximum
- Attachment between this lanyard and any other equipment or anchorage point shall only be carried out with connectors in accordance with EN 362.

PACKAGING

- Individual packing in a black bag
- Carton of 5 anchorage lines

NORMALISATION

This anchorage line is in conformity with the model of individual safety equipment which correspond to

EN 795:1996

The CE Type-examination certificate 3559 Issue 1 Extension 3 Delivered by SATRA

(notified body n° 0321)

